



TYPICAL REINFORCED CONCRETE SLAB SECTION

- UNLESS NOTED OTHERWISE ON PLAN
- NOTES:
1. FOR PRIMARY REINFORCEMENT SIZE AND NUMBER, SEE PLANS
 2. DETAILS ABOVE APPLY UNLESS SHOWN OTHERWISE ON PLANS
 3. BOTTOM DISTRIBUTION BARS TO BE N12-300 LAPPED 400 MIN (UN)
 4. TOP DISTRIBUTION BARS TO BE N12-300 LAPPED 400 MIN (UN)
 5. FOR PRIMARY AND SECONDARY DIRECTIONS OF REINFORCEMENT SEE PLANS
 6. PROVIDE ADEQUATE BAR CHAIRS OR SUPPORT CAGES TO SUPPORT REINFORCEMENT AT CORRECT LEVEL
 7. FOR SLABS REINFORCED WITH BOTTOM FABRIC, THE FABRIC SHALL BE IN ONE PIECE IN DIRECTION OF SHORT SPAN, MAIN WIRES TO BE LOWER LAYER
 8. TO BE READ IN CONJUNCTION WITH PLANS - PLANS GOVERN

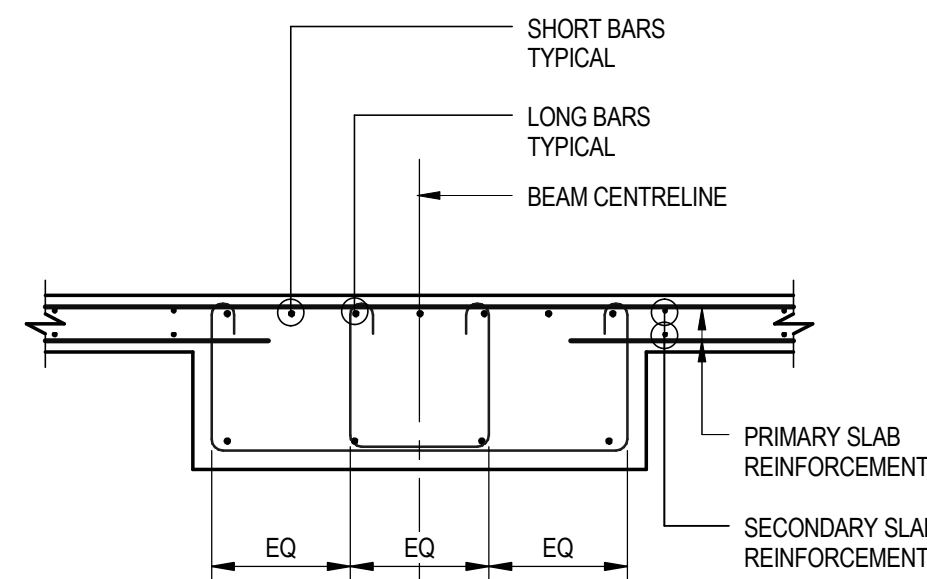


TYPICAL 1200 WIDE BAND BEAM REINFORCEMENT DETAIL

- NOTE:
1. FOR REINFORCEMENT SIZES & NUMBER REFER TO PLANS
 2. DETAILS ABOVE APPLY UNLESS NOTED OTHERWISE ON PLANS
 3. PROVIDE ADEQUATE BAR CHAIRS OR SUPPORT CAGES TO SUPPORT REINFORCEMENT TO CORRECT LEVELS

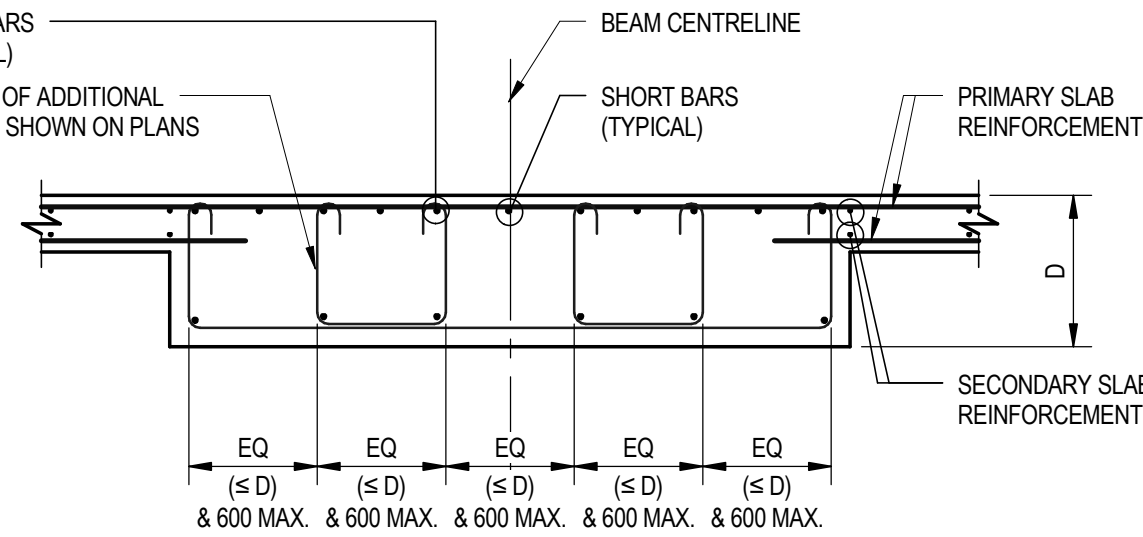

TYPICAL 1800 WIDE BAND BEAM REINFORCEMENT DETAIL


- NOTE:
1. FOR REINFORCEMENT SIZES & NUMBER REFER TO PLANS
 2. DETAILS ABOVE APPLY UNLESS NOTED OTHERWISE ON PLANS
 3. PROVIDE ADEQUATE BAR CHAIRS OR SUPPORT CAGES TO SUPPORT REINFORCEMENT TO CORRECT LEVELS

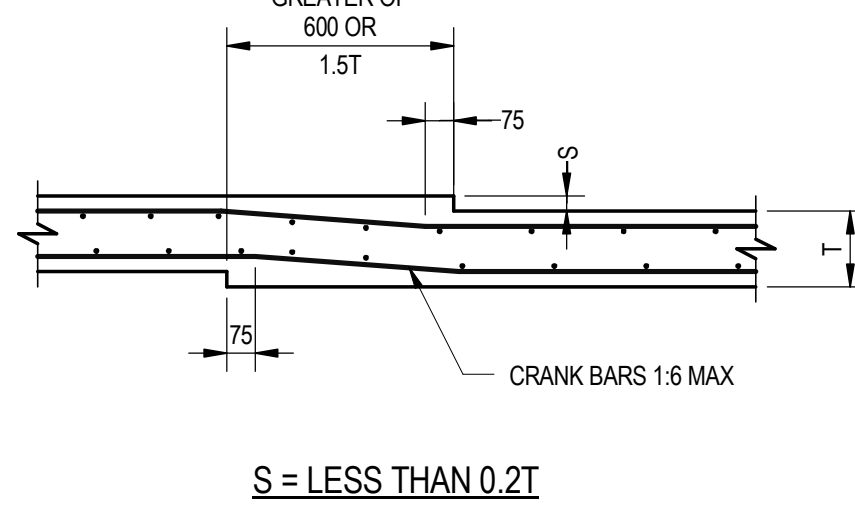


SUSPENDED SLAB STEPS

- NOTES:
1. DETAILS APPLY UNLESS SHOWN OTHERWISE ON THE DRAWINGS
 2. REFER ALSO TO GENERAL NOTES ON DRAWING S001
 3. SETDOWNS GREATER THAN 1.5T TO ENGINEERS DETAIL
 4. ALL COSS SHALL HAVE AN INTERNAL RADIUS IN ACCORDANCE WITH AS3600
 5. FOR DEVELOPMENT LENGTH, REFER TO LAP/SPICE STANDARD SCHEDULE
 6. MINIMUM INTERNAL DIAMETER OF ALL BAR BENDS SHALL BE 10 BAR DIAMETER
 7. SETDOWNS AND STEPS ARE DENOTED ON PLANS AS


(REFER TO ARCHITECTS DRAWINGS FOR EXTENT AND DEPTH OF SETDOWN AND/OR STEP)

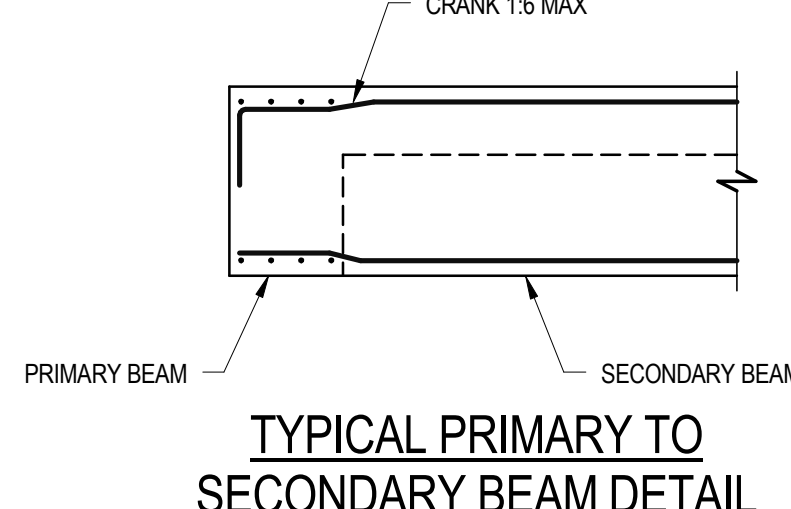


TYPICAL PRIMARY TO SECONDARY BEAM DETAIL

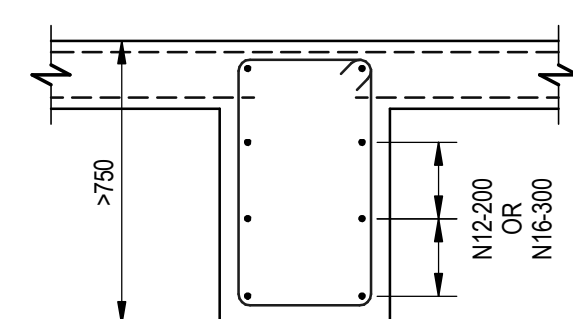


TYPICAL SIDE FACE REINFORCEMENT DETAIL FOR BEAM ≥ 750 IN DEPTH

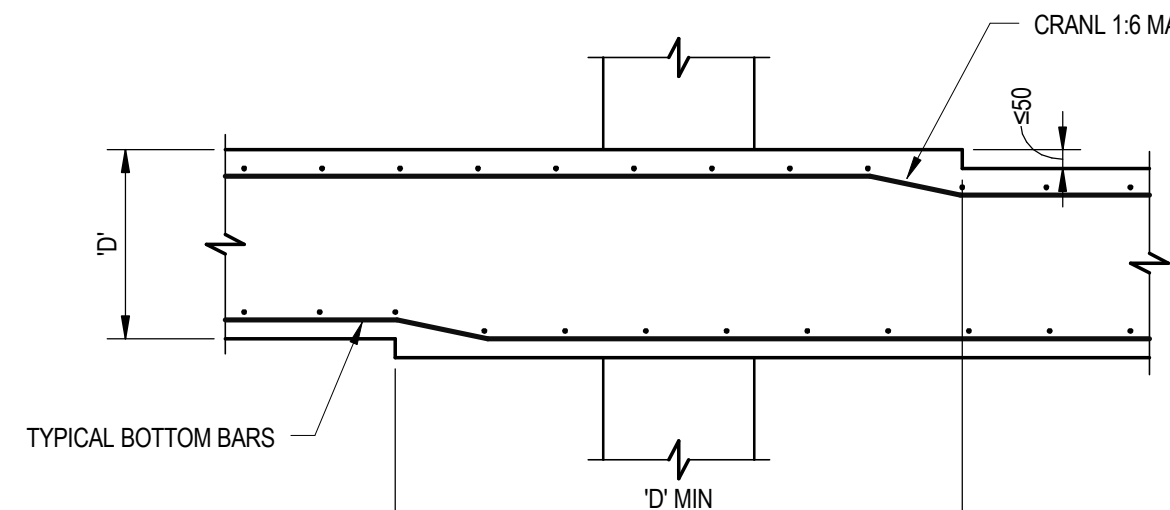


TYPICAL BOTTOM BARS

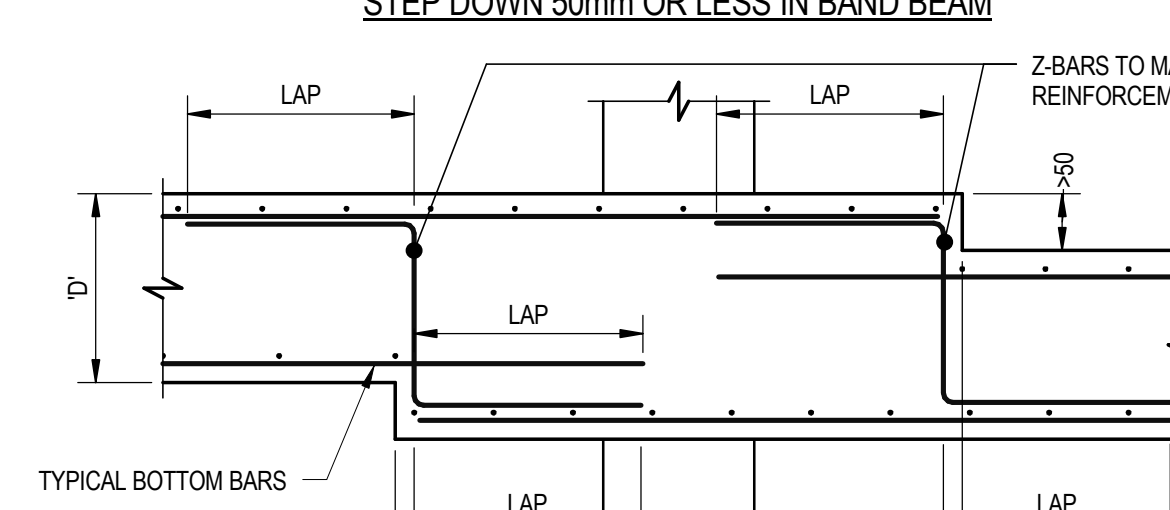

TYPICAL BOTTOM BARS




TYPICAL BOTTOM BARS

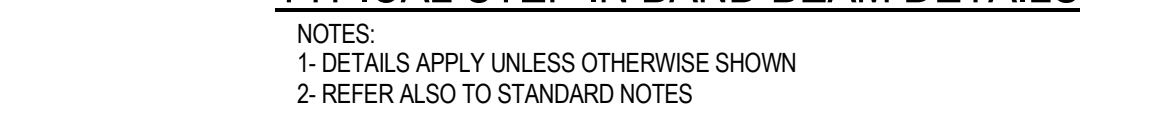

TYPICAL BOTTOM BARS



TYPICAL BOTTOM BARS




TYPICAL BOTTOM BARS




TYPICAL BOTTOM BARS



TYPICAL BOTTOM BARS

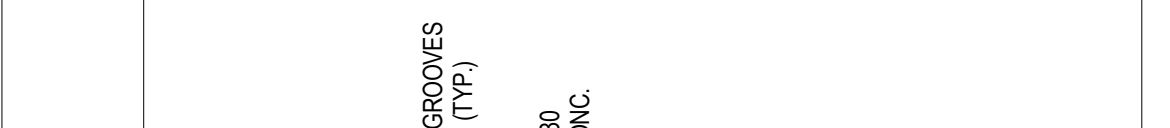

TYPICAL BOTTOM BARS




TYPICAL BOTTOM BARS




TYPICAL BOTTOM BARS



TYPICAL BOTTOM BARS



TYPICAL BOTTOM BARS

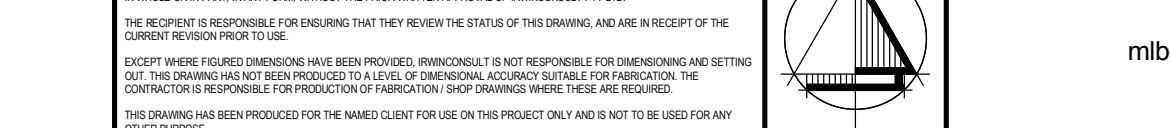

TYPICAL BOTTOM BARS



TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

TYPICAL BOTTOM BARS

