


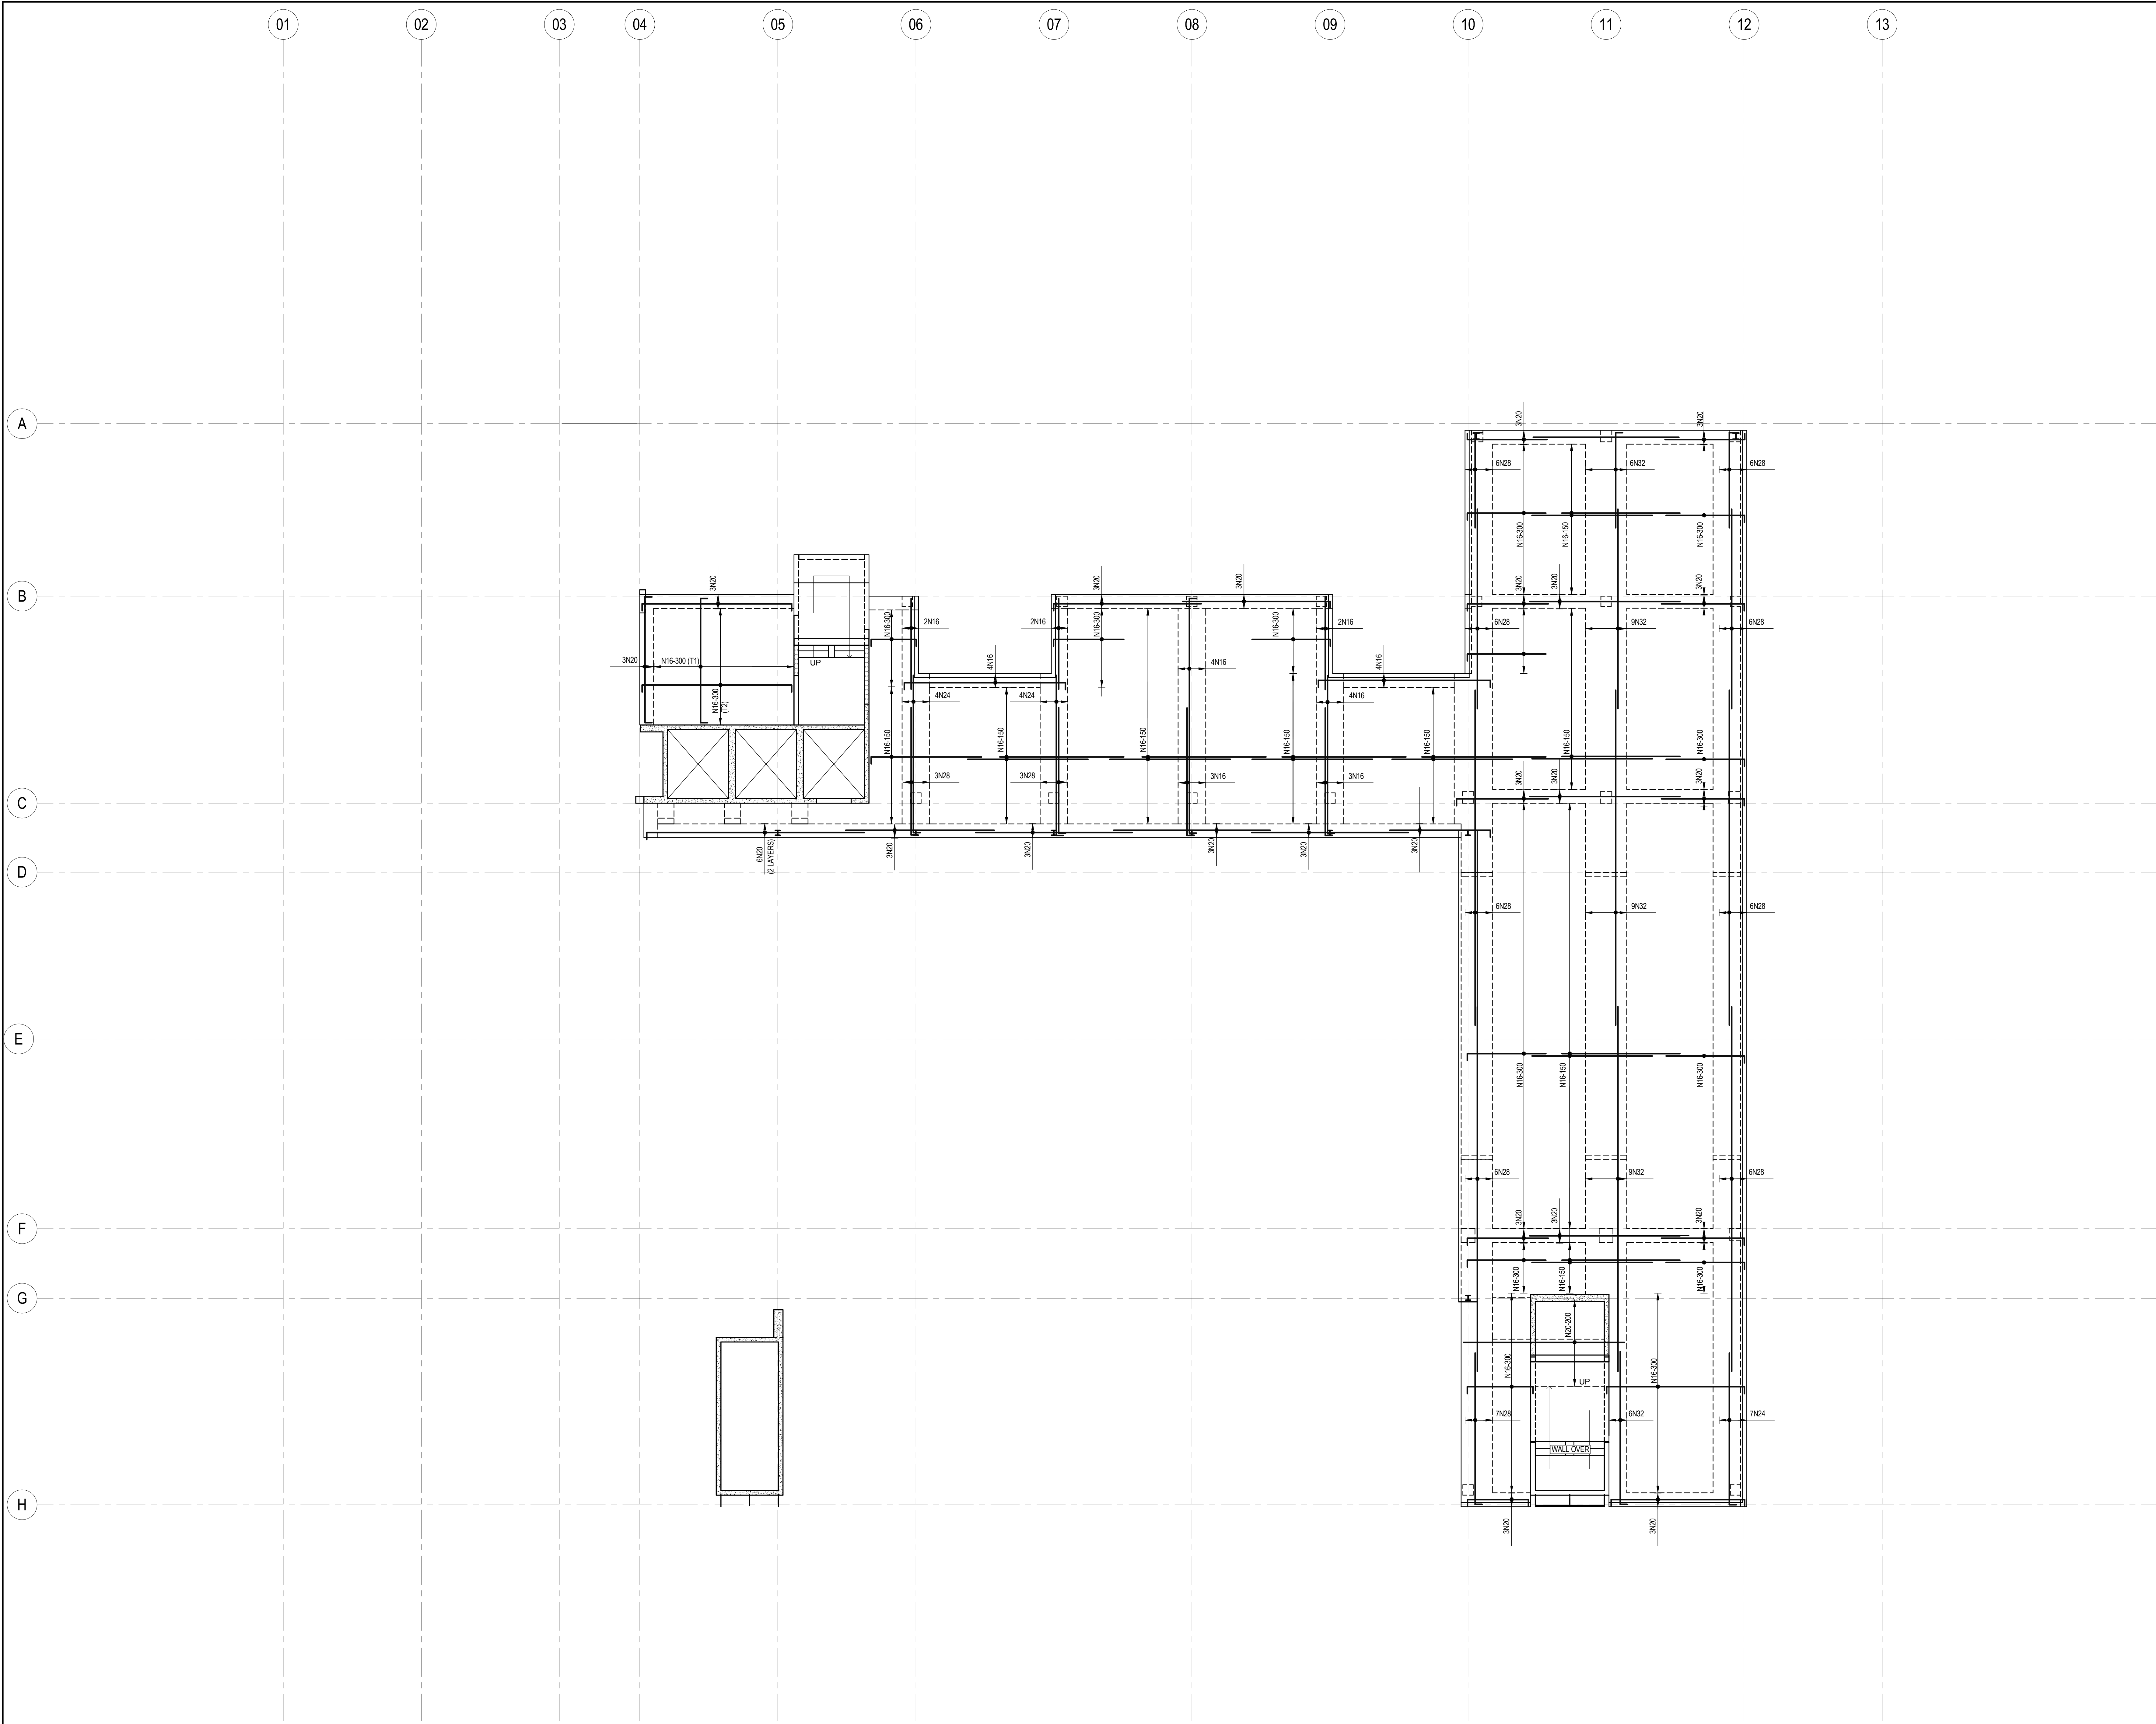

TOP REINFORCEMENT:

TOP LAYERS


TOP SLAB BARS PLACED IN T1 UNLESS NOTED OTHERWISE.
TOP BEAM BARS PLACED IN LAYER T2
BEAM LIGATURES PLACED IN T1 UNLESS NOTED OTHERWISE.

DISTRIBUTION REINFORCEMENT

(NOT SHOWN ON PLAN)
SLABS TO HAVE N12-300 TRANSVERSE BARS TOP PLACED IN LAYER T2.
PROVIDE 800 RANDOM LAPS TO BARS.
STANDARD CROSS AT ENDS AND OPENINGS.

Rev	Description	By	Date	Rev	Description	By	Date	Rev	Description	By	Date	Rev	Description	By	Date
A	CONSTRUCTION ISSUE	BP	14.01.13												
4	TENDER ISSUE	BP	07.09.12												
3	TENDER ISSUE	BP	31.08.12												
2	95% C.D. ISSUE	BP	17.08.12												
1	75% C.D. ISSUE	BP	27.07.12												

CONSTRUCTION ISSUE

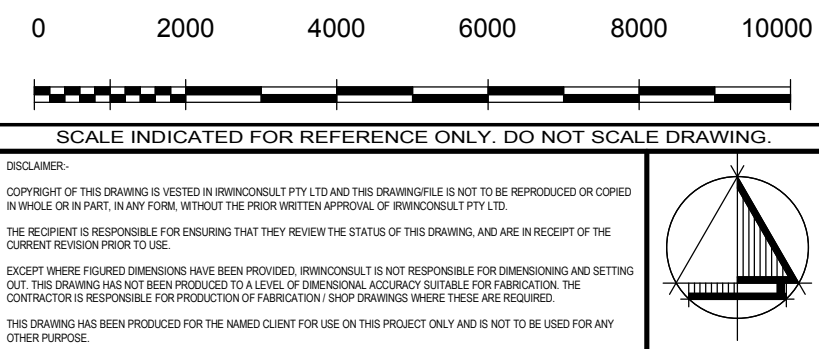

irwinconsult

Level 3, 289 Wellington Parade South
East Melbourne VIC 3002
t +61 3 9622 9700 f +61 3 9650 6664
mb@irwinconsult.com.au ABN 89 050 214 694

Project
FACULTY OF ARCHITECTURE
BUILDING AND PLANNING
Client
UNIVERSITY OF MELBOURNE
PARKVILLE CAMPUS

Drawing Title
LEVEL 5 TOP REINFORCEMENT PLAN

Date	Drawn	Checked	Approved
04/16/12	B.P.	D.I.	B.R.
Scales at A0	Job No.	Sheet No.	Rev.
1 : 100	09ME0504	S503	A