
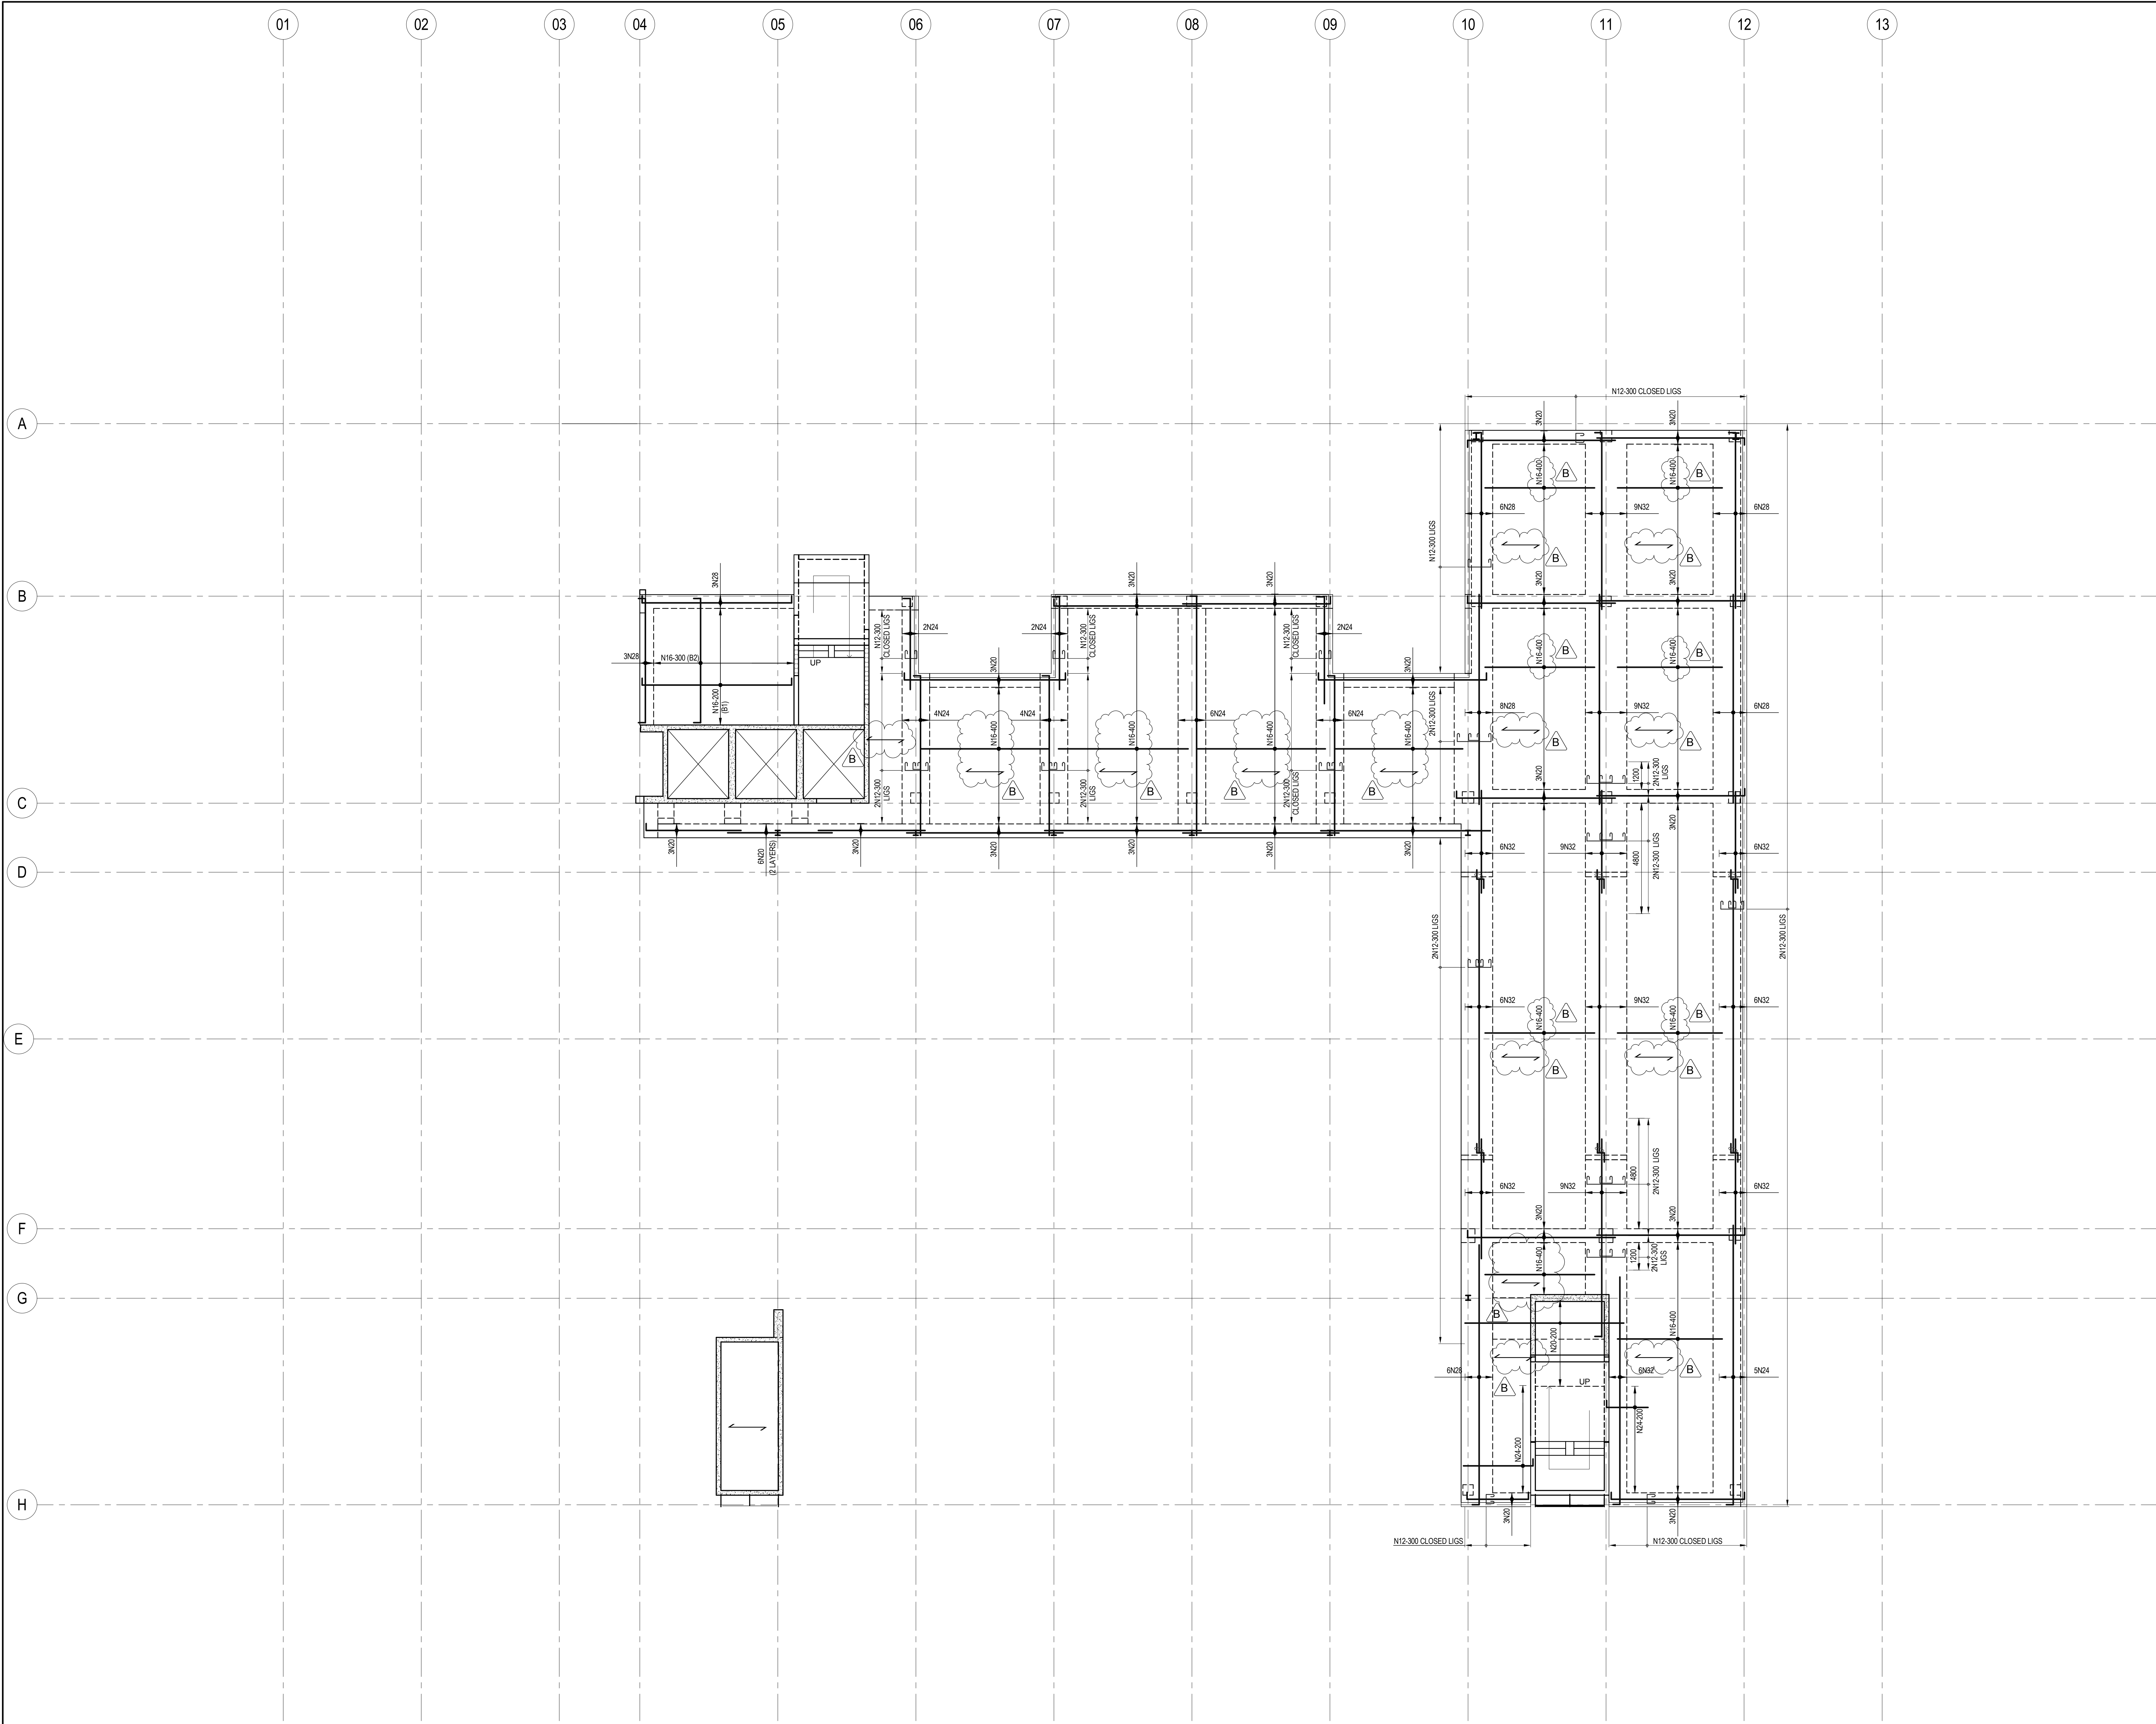






BOTTOM REINFORCEMENT:

FIRST LIG PLACED 50mm FROM COLUMN FACE.
CLOSED LIGS TO HAVE 135° HOOKS WITH
7mm STRAIGHT EXTENSIONS.
IF LIGATURES NOT SHOWN ON PLAN FOR BEAMS
PROVIDE LIGS AS SHOWN BELOW

LIGS

N12  -900 CTS. THROUGHOUT BEAMS 1501-1800W.
N12  -900 CTS. THROUGHOUT BEAMS 1200-1500W.
N12  -900 CTS. THROUGHOUT BEAMS 600-1150W.
N12  -300 CTS. THROUGHOUT BEAMS UP TO 600W.

BOTTOM LAYERS

BOTTOM SLAB BARS PLACED IN LAYER B1 UNLESS NOTED OTHERWISE.
BOTTOM BEAM BARS PLACED IN LAYER B2
BEAM LIGATURES PLACED IN B1 UNLESS NOTED OTHERWISE.

DISTRIBUTION REINFORCEMENT

(NOT SHOWN ON PLAN)
SLABS ON TRADITIONAL FORMWORK TO HAVE N12-300 TRANSVERSE BARS
BOTTOM IN B2 LAYER. PROVIDE 600 LAP TO TRANSVERSE BARS BOTTOM.

STEEL DECKING


 DENOTES STEEL DECKING FORMWORK AS PERMANENT BOTTOM
REINFORCEMENT. RIBS PARALLEL TO SPAN MARK.
- DECKING NOT TO BE CUT
- REFER MANUFACTURER'S DETAILS FOR PROPPING RECOMMENDATIONS
- SLABS ON METAL DECK FORMWORK TO HAVE N16-300 TRANSVERSE BARS BOTTOM

 REPRESENTS SAME No. AND SIZE
SPRICE BARS TO CRANKED BARS

 DENOTES A CRANKED BAR. NOTE THAT PLANS DO
NOT SHOW ALL CRANKED BARS. REFER STANDARD
DETAILS ON DRG 8550 FOR CRANKS REQUIRED AT
SETDOWNS, STEPS, ETC.

Rev	Description	By	Date	Rev.	Description	By	Date	Rev.	Description	By	Date	Rev.	Description	By	Date
B	REVISED AS CLOUDED	BP	06.03.13												
A	CONSTRUCTION ISSUE	BP	14.01.13												
3	TENDER ISSUE	BP	07.08.12												
2	95% C.D. ISSUE	BP	17.08.12												
1	75% C.D. ISSUE	BP	27.07.12												

CONSTRUCTION ISSUE

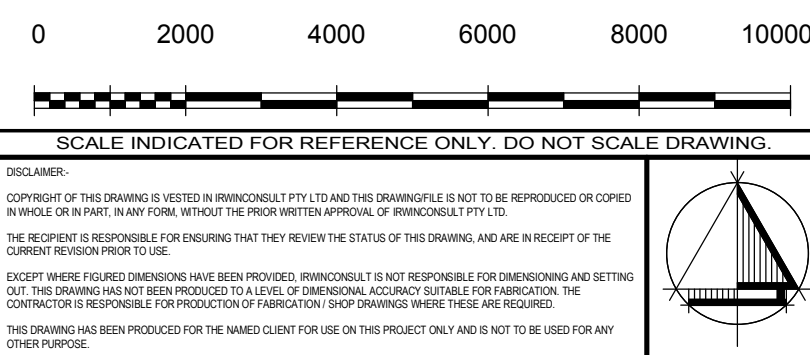

irwinconsult

Level 3, 289 Wellington Parade South
East Melbourne VIC 3002
t +61 3 9622 9700 f +61 3 9650 6664
mb@irwinconsult.com.au ABN 89 050 214 694

Project
FACULTY OF ARCHITECTURE
BUILDING AND PLANNING

Client
UNIVERSITY OF MELBOURNE
PARKVILLE CAMPUS

Drawing Title
LEVEL 5 BOTTOM REINFORCEMENT PLAN

Date	Drawn	Checked	Approved
04/16/12	B.P.	D.J.	B.R.
Scales at A0	Job No.	Sheet No.	Rev.
1 : 100	09ME0504	S502	B