


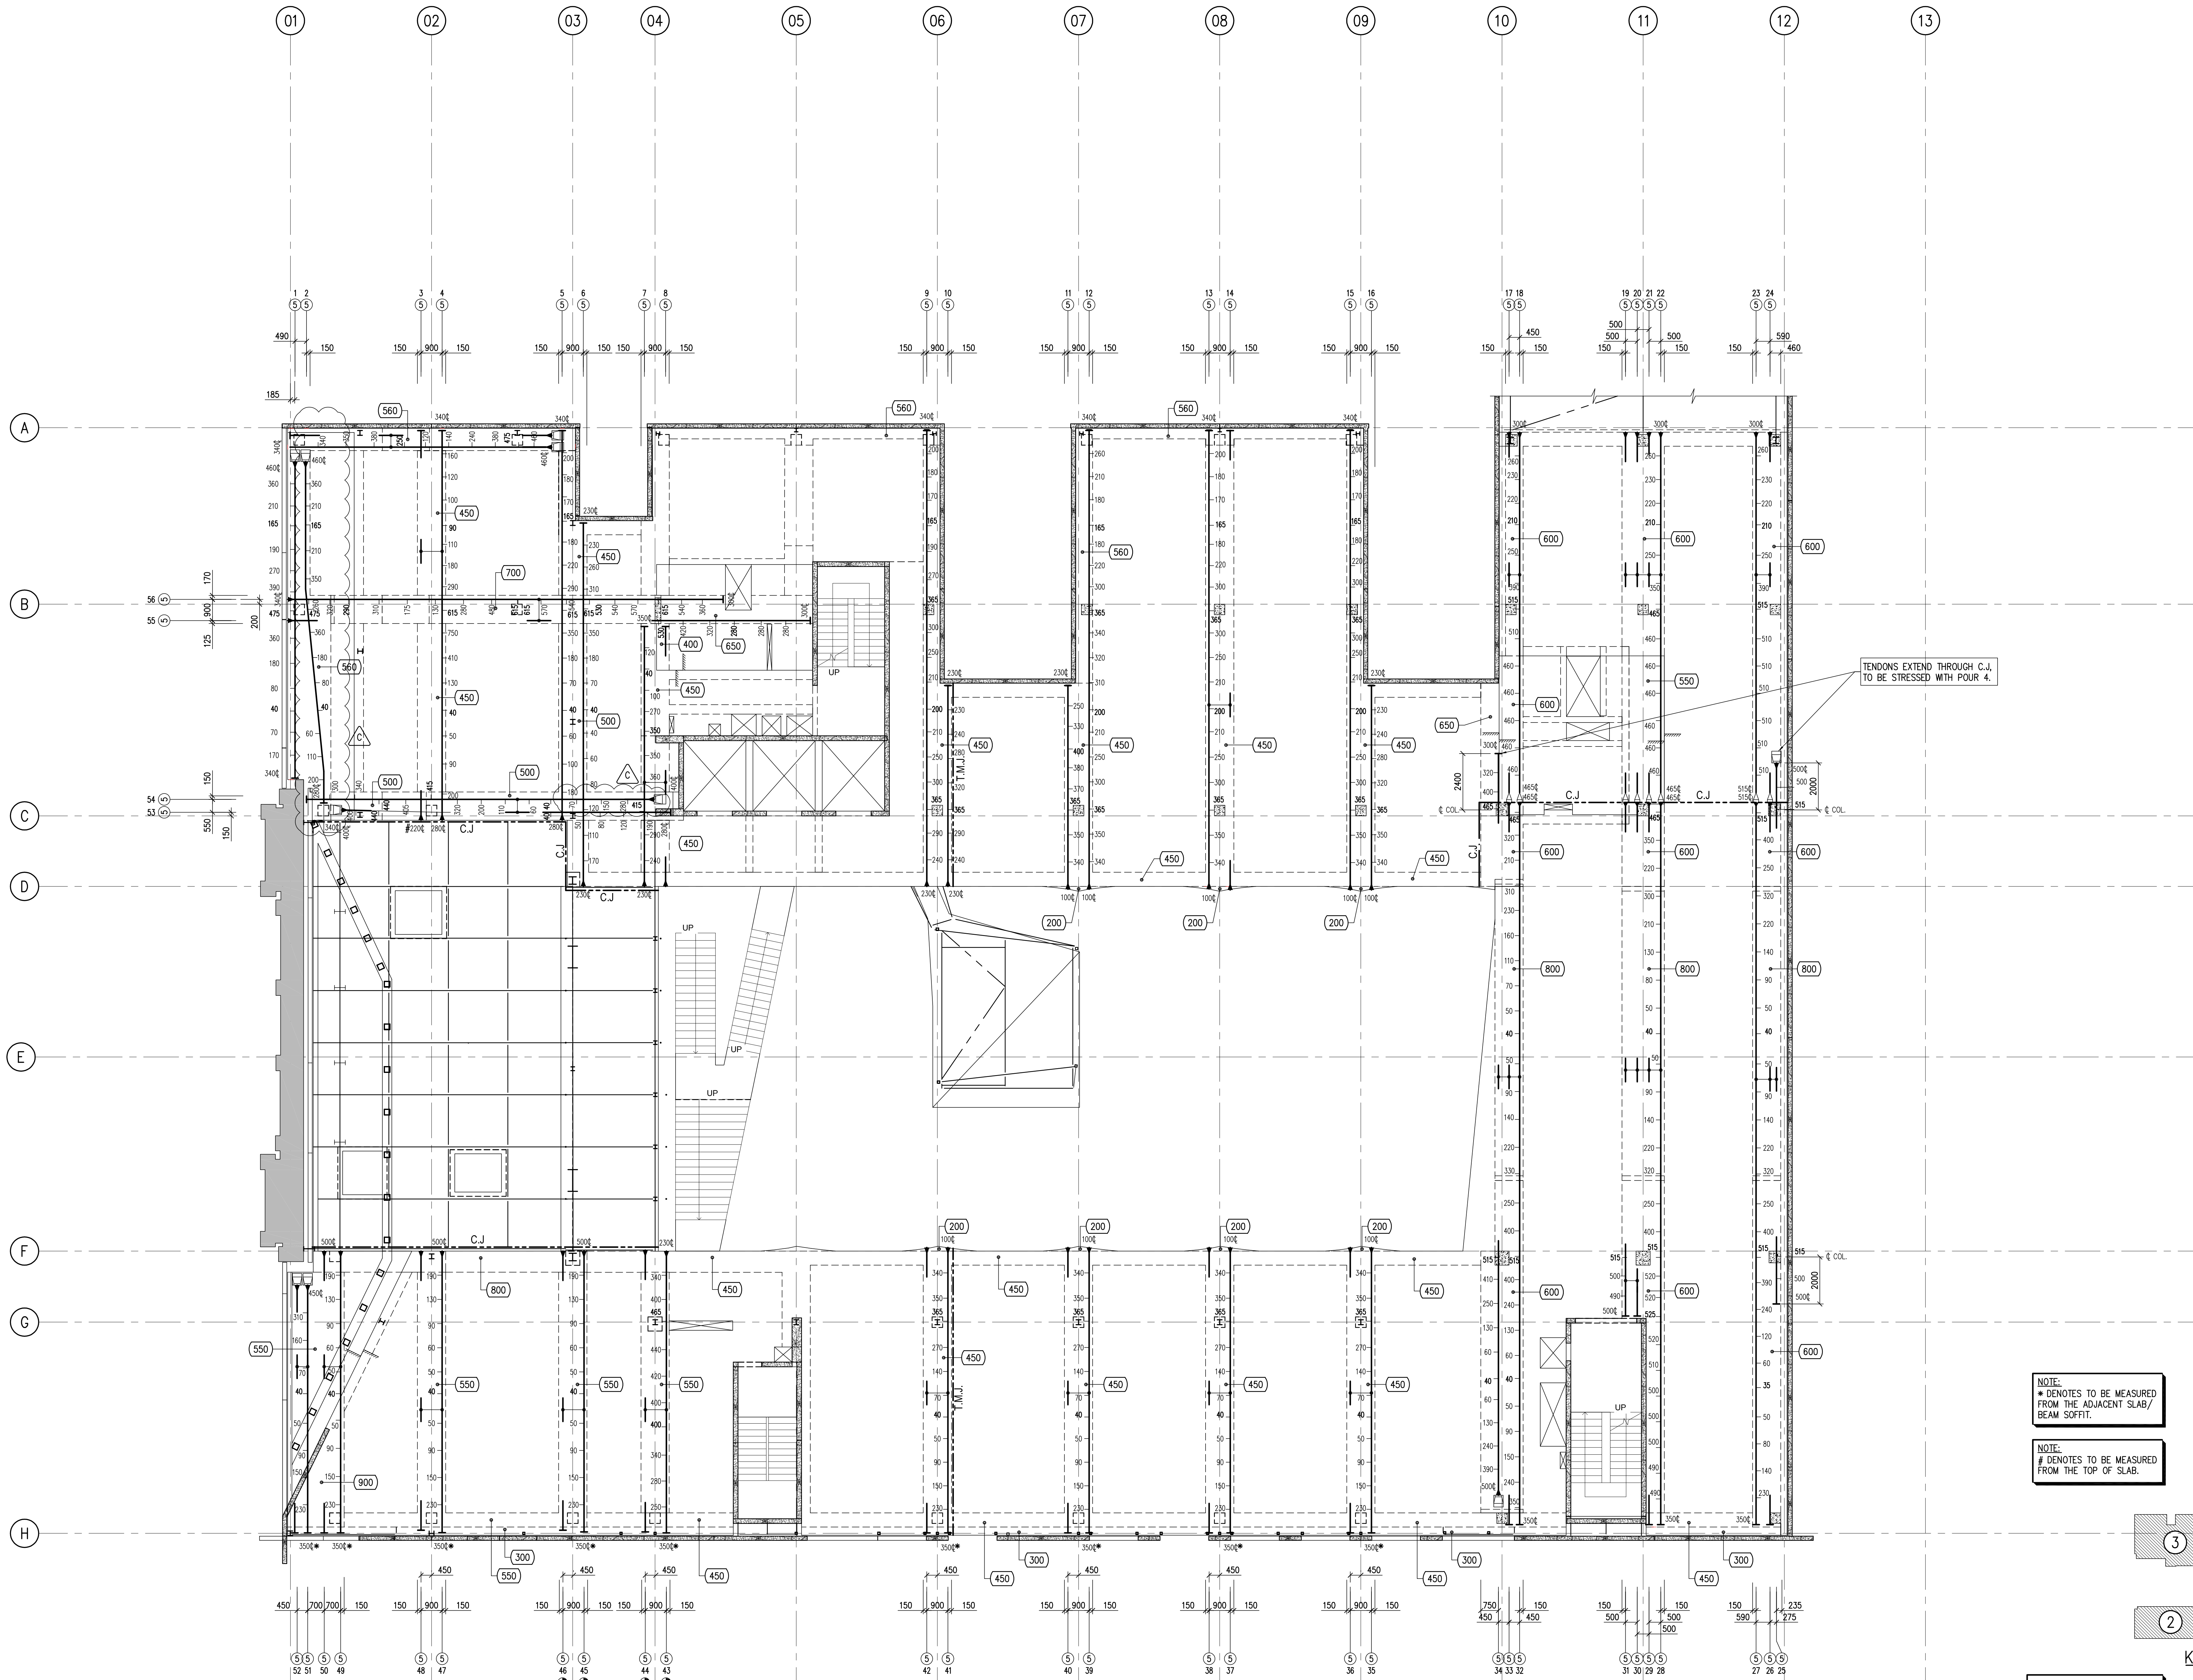

- POST-TENSIONING NOTES
- All stressing workmanship and materials shall comply with S.A.A. Concrete Structures Code A.S. 3600-2001.
 - Following completed installation of anchorages and tendons, care must be taken to prevent damage or movement of any of the components. Particular care shall be taken during placing and compacting of concrete around anchorages to ensure that full compaction is achieved and that no part of the anchorage or tendon or their ancillaries is moved from its correct position.
 - Anchorage designation:
 - top stressing pan.
 - live end anchorage.
 - dead end anchorage.
 - couplers.
 - terminated strand.
 - Tendon designation:
 - tendon no. 50
 - no. of strands.
 - Dimensions indicated are to the underside of the duct from the soffit of the slab except at the anchorages, where dimensions are to the centreline of the tendon. Tendons shall be located to a vertical tolerance of ± 5 or ± 25 mm.
 - Wherever there is conflict between a tendon and any kind of conduit or reinforcement, the tendon profile shall govern.
 - The stated tendon spacing is indicative only. In the event of any constraint to the post-tensioning works, the spacing shall be adjusted accordingly to suit the site condition.


- GENERAL NOTES:
- These drawings shall be read in conjunction with the applicable Architects, Consultant's and Builder's drawings.
 - All dimensions relevant to setting out shall be verified by the Builder before construction is commenced.
 - Formwork and scaffolding shall be extended beyond tendon anchorage point to provide space for stressing operations. Safety hoarding for stressing shall be provided.
 - Concrete mix design and curing shall be to Structural Engineer's specification.
 - Stripping of formwork and backpropping details to Structural Engineer's specification.

- 15.2mm STRANDS
- 15.2 mm nominal diameter strands shall be seven wire super grade, stress relieved, low relaxation to A.S. 4672.1 Minimum breaking load = 250kN
 - Jacking force per strand shall be 212.5kN (85% minimum breaking load) UNO.
 - Stressing sequence UNO.


Initial stress	At minimum 24 hours and concrete strength = 20MPa jack each strand to 50kN
Final stress	After 5 days minimum and at concrete strength = 25MPa jack each strand to 212.5kN UNO.

- 12.7mm STRANDS
- 12.7 mm nominal diameter strands shall be seven wire super grade, stress relieved, low relaxation to A.S. 4672.1 Minimum breaking load = 154kN
 - Jacking force per strand shall be 156kN (85% minimum breaking load) UNO.
 - Stressing sequence UNO.


Initial stress	At minimum 24 hours and concrete strength = 20MPa jack each strand to 40kN
Final stress	After 5 days minimum and at concrete strength = 25MPa jack each strand to 156kN UNO.

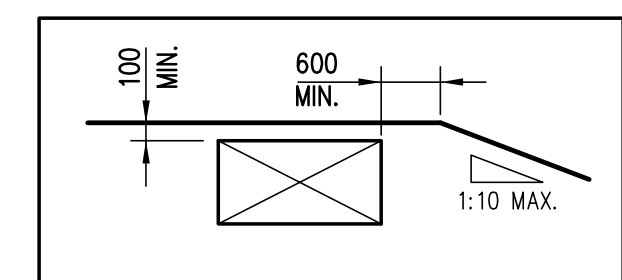

TYPICAL TENDON DETAIL AT PENETRATIONS & OPENINGS

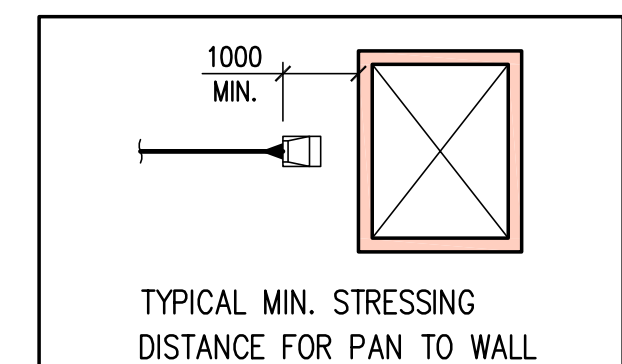

TYPICAL MIN. STRESSING DISTANCE FOR PAN TO WALL

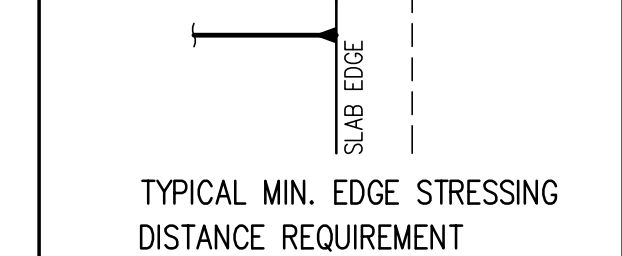


TYPICAL MIN. EDGE STRESSING DISTANCE REQUIREMENT

THE INFORMATION USED TO PRODUCE THIS SHOP DRAWING WAS TAKEN FROM IRWIN CONSULTING ENGINEERS DWG'S: S401 (REV F) & S404 (REV C)

NOTE:
DENOTES TO BE MEASURED FROM THE ADJACENT SLAB/ BEAM SOFFIT.

NOTE:
DENOTES TO BE MEASURED FROM THE TOP OF SLAB.

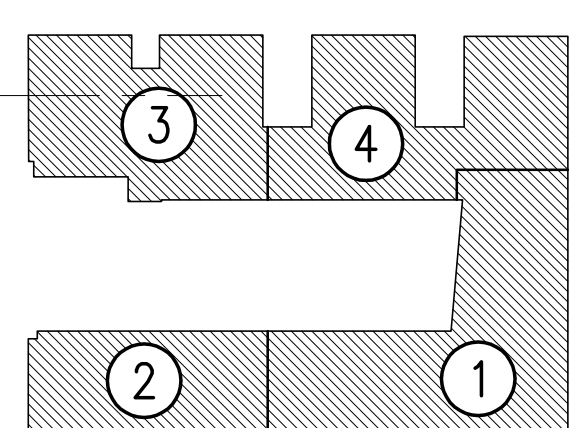

KEY PLAN

15.2Ø STRANDS SYMBOL

12.7Ø STRANDS U.N.O

ISSUED FOR CONSTRUCTION

C	27/08/13	B.T.	-	REVISED AS CLOUDED
B	09/08/13	B.T.	-	ISSUED FOR CONSTRUCTION.
A	27/08/13	B.T.	-	ISSUED FOR CONSTRUCTION.
D	27/08/13	B.T.	-	ISSUED FOR APPROVAL.
Issue	Date	Drawn	Checked	Description
FREYSSINET AUSTRALIA PTY. LIMITED A.B.N. 18 002 617 736 217 ARDEN ST NORTH MELBOURNE 3051 VIC AUSTRALIA TELEPHONE: (03) 9321 1333 FACSIMILE: (03) 9321 1380 EMAIL: melbourne@freysinet.com.au WEB PAGE: www.freysinet.com.au AUSLAND - BRISBANE - MELBOURNE - PERTH - SYDNEY				
This drawing remains the property of FREYSSINET AUSTRALIA PTY LIMITED and must not be used or copied without written consent.				
Project: UNIVERSITY OF MELBOURNE PARKVILLE CAMPUS				
Title: LEVEL 4 POST TENSIONING LAYOUT PLAN				
A0				
Date	AUG '13	Scale	1:100	
Designed	-	Authorised		
Drawn	B.T.	Date		
Project No	3020525	Drawing No.	PT005	Rev
FILE NAME:				
PLOT DATE:				